

ANSWER YOUR DOOR ANYWHERE.



HOW DOES IT WORK

Imagine, you are not at home and your children have locked themselves out or the courier delivers a package. With DoorBird this is no longer a problem. Each time someone rings the doorbell you get a push notification on your smartphone or tablet. You can then not only talk to the visitor but also see him in HD quality. You will never miss a visitor again. With DoorBird you are on the go and still at home, even if a burglar presses the doorbell to check if someone is at home.

SMART HOME STARTS AT THE FRONT DOOR

DoorBird is the smart solution for your door entrance. The IP Video Door Station can be used as a stand-alone unit or can be integrated into an existing Smart-Home platform. Even existing classic installations such as a door chime or an electric door and gate opener can still be used and controlled via the App.

QUALITY MADE IN GERMANY

DoorBird is designed, developed and produced in Berlin, Germany. DoorBird's "Made in Germany" is not only a motto but a philosophy. All DoorBird IP Video Door Stations are manufactured and tested in Berlin to guarantee the highest quality, longevity and customer satisfaction.

ADVANTAGES



Open API

- Local interface for the integration with third-party systems and SIP



Video and audio call

- On smartphones and tablets (iOS, Android) or landline phones (SIP)



Smart Transmission Mode (STM)

- Real-time audio / video communication, optimized for mobile devices via WiFi, 3G, 4G, 5G



Smart Home & ONVIF compatible

- Control4, Loxone, Crestron, Synology, QNAP, AVM FRITZ!fon, URC, RTI, ELAN, Fibaro, Bang & Olufsen and others




Individual time and action plans, e.g.:

- RFID card „abc“ has only admission on Wednesday from 9 am until 11 am
- 4D motion sensor switches on external lamp between 9 pm and 6 am



DoorBird
Technology meets Design.

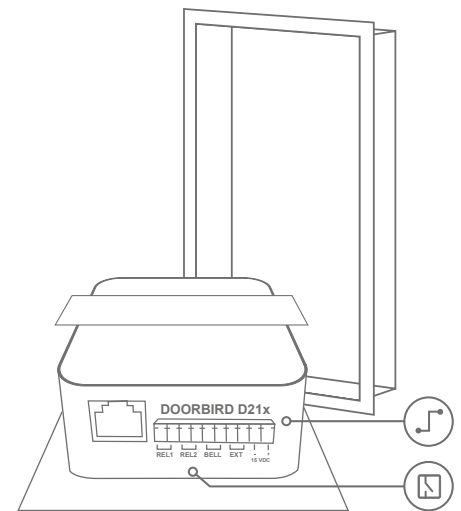

Automatic door opener

- For use in medical offices and office environments



Free cloud recording

- Can be optionally activated for visitor history



Geofencing

- Automatic door and gate opening when returning home



Burglary prevention

- Prevents more break-ins than an alarm system



Receive packages at any time

- Direct the delivery man e.g. to the neighbor or open the garage door via smartphone



Night vision

- With 12 IR LEDs



Light sensor

- For night vision mode



Motion sensor with 4D technology

- Distance up to 10 m adjustable via App (interval: 1 m)



HDTV Video

- Ultra-wide-angle, hemispheric lens, 180°



Echo and noise suppression (AEC, ANR)



RFID card reader

- Configurable remotely via App (e. g. schedules)



Call button

- With backlit nameplate



Easy connection to the network


- Connection via RJ45 socket or bell wire via 2-wire transformer (PoE, network data)




Two freely configurable bi-stable switching relays

- Control two doors or gates via App
- Status configurable via App: Temporary or permanent circuit


Front panel material thickness: 3.0 mm (0.12 in)

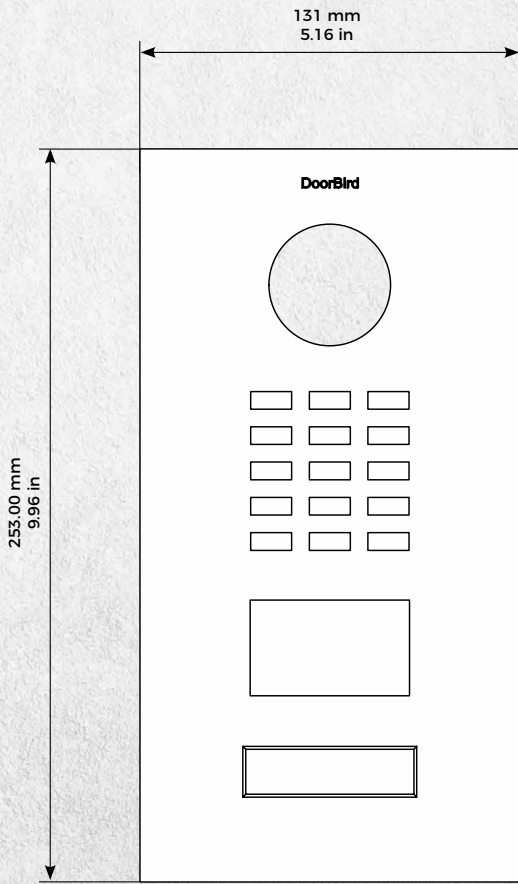

Front panel

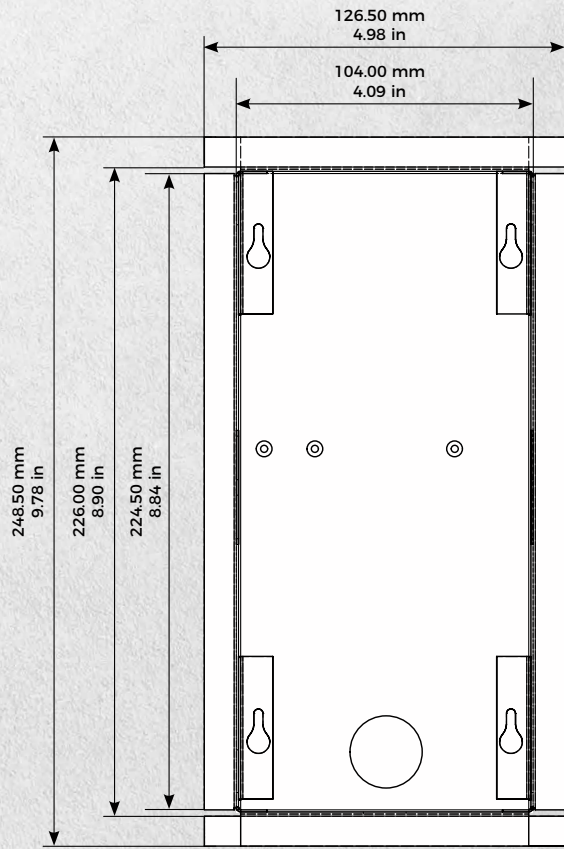


Flush-mounting housing (backbox)

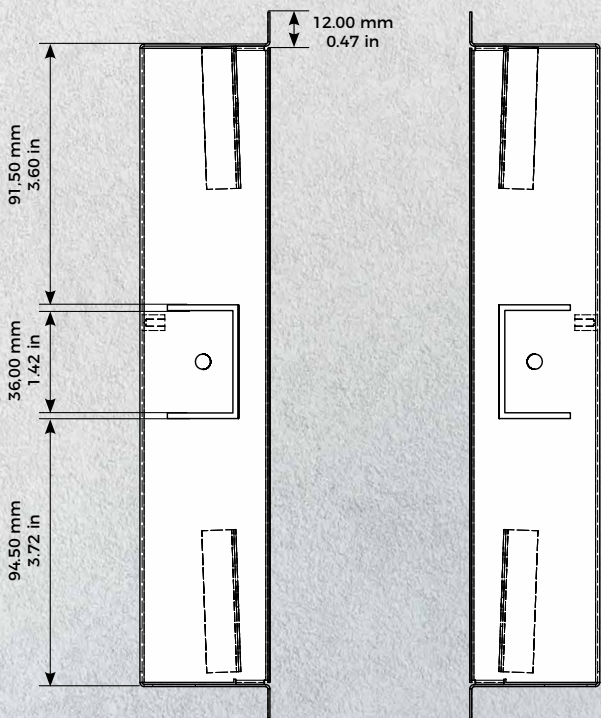

Flush-mounting housing (backbox)

Flush-mounting housing (backbox)

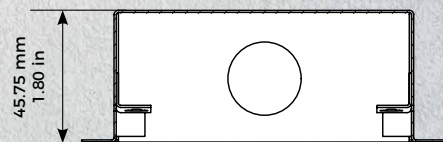

Flush-mounting housing (backbox)

Front panel	3 mm (0.12 in) Available in over 50 RAL colors and surfaces including stainless steel V2A /V4A (see material guide)	Camera	HDTV 720p, dynamic (VGA - HDTV)
Mounting housing (backbox)	Stainless steel	Lens	High-end ultra wide-angle hemispheric lens 180° horizontal, 90° vertical, straightened, IR-capable
Mounting type	Flush-mounted, surface-mounting housing sold separately	Night-vision	Yes, light sensor, automatic IR-cut filter, 12 IR-LEDs (850 nm)
Call button	Plastic. Engravable metal nameplate sold separately, see www.doorbird.com/buy	Audio components	Speaker and microphone, echo and noise cancellation (AEC, ANR)
Nameplate	Illuminated	Audio streaming	Two-way, full duplex
Power supply	15 V DC (max. 15 W) or Power over Ethernet (PoE 802.3af Mode-A)	Ethernet	RJ45 jack, PoE 802.3af Mode-A
Weight	1577 g	Type	Active
Connectors	<ul style="list-style-type: none"> • RJ45, for LAN/PoE • Bi-stable latching relay #1, max. 1-24 V DC/V AC, 1 Ampere, e.g. for electric door opener • Bi-stable latching relay #2, max. 1-24 V DC/V AC, 1 Ampere, e.g. for electric door opener • External input for external door opener button (potential-free) • 15 V DC input (+, -), max. 15 W 	Detection angle	54° horizontal, 70° vertical
Weather-proof	Yes, IP65	Range	1 - 10 m (3.3 - 32.9 ft), depends on environment, configurable in 1 m (3.3 ft) steps.
Approvals	CE, IC, FCC, RoHS, IP65, IK08	Technology	4D. Based on multiple integrated sensors and algorithms, e.g. Radio Frequency Energy (RFE)
Dimensions	253 x 131 x 48,75 mm (H x W x D) 9.96 x 5.16 x 1.92 in (H x W x D)	Configuration	<p>Via App, e.g.</p> <ul style="list-style-type: none"> • Range (1 - 10 m / 3.3 - 32.9 ft) • Movement direction (coming, leaving, both) • Individual events (e.g. switch a relay, push notification, SIP call [audio/video], HTTP(s) notification) • Individual schedules
Operating conditions	-25 to +55°C / -13 to 131°F Humidity 10 to 85 % RH (non condensing)	Type	Active Reader Passive Tag (ARPT) system
Scope of delivery	<p>1x Main Electrical Unit</p> <p>1x Front panel</p> <p>1x Flush-mounting housing (backbox)</p> <p>1x Power supply unit (mains adaptor) with four country-specific adaptors (110 - 240 V AC to 15 V DC)</p> <p>1x RFID key fob</p> <p>1x Screwdriver</p> <p>1x Quickstart guide with Digital Passport</p> <p>1x Installation manual</p> <p>1x Small parts</p>	Standard	ISO/IEC 18000-2:2009 Part 2, EM4100, EM4102
Warranty	see www.doorbird.com/warranty	Frequency	125 KHz
System requirements	<p>Internet: High-Speed Landline Broadband Internet connection, DSL, cable or fiber optic, no socks or proxy server</p> <p>Network: Ethernet Network, with DHCP</p> <p>Camera lens should be at a min. height of 145 cm (57 in). Before the installation please determine your optimal installation height.</p>	Range	0 - 3 cm, depends on environment
Recommended installation height		Antenna	Internal
		Compatible Transponder	RFID key fobs, sold separately, see www.doorbird.com/buy
		Configuration	<p>Up to 100 tags manageable</p> <p>Via app, e.g.</p> <ul style="list-style-type: none"> • Tag (add, delete) • Individual events (e.g. switch a relay, push notification, SIP call [audio/video], HTTP(s) notification) • Individual schedules
		RFID	125 KHz
		Sensor	24 GHz, can be disabled
		Sold separately	see www.doorbird.com/buy
		Special remarks:	Assembly requires professional skills or a technician.