

Wh
km

Avg.
183

HOMEBOX SMART


DYNAMIC CHARGING AND LOAD BALANCING



Options:

- Tesla Button
- Key switch
- Console
- RCD type B
(for use in the electrical cabinet)

The HomeBox Smart is capable of dynamically adjusting the charging current, depending on other loads that use the same mains connection. Apart from the basic charging station it includes current transformers (CT's) to be clicked on the incoming lines in the electrical cabinet and a sensor-box that has to be connected to the charging station. On the display unit of the charging station it is possible to configure all settings. The HomeBox Smart also offers load balancing. This makes it possible to connect up to 4 HomeBox modules to each other while sharing one mains supply.

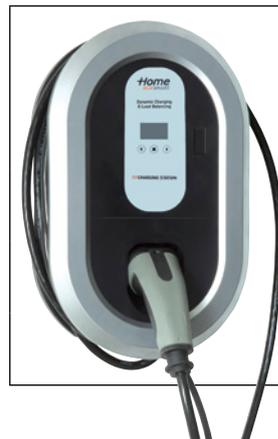

HOMEBOX SMART WITH FIXED CABLE 5M AND TYPE 2 PLUG

P/N	ENERGY RATING
37601	7,4kW
37611	22kW



HOMEBOX SMART WITH OUTLET TYPE 2

P/N	ENERGY RATING
37602	7,4kW
37612	22kW

Charging system:	IEC 61851 Mode 3
Housing:	PC/ABS
Dimensions mm:	400 x 250 x 105
Weight:	4 kg
Enclosure rating:	IP54
Operating Temperature:	-25° to +40° C
Marking:	CE

Ratio
ELECTRIC